



Fotometria/Photometrics

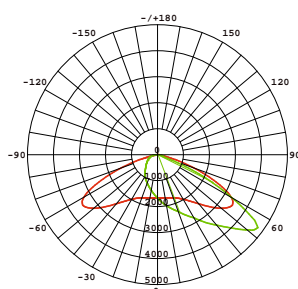

65°x140° asym.

Napięcie zasilania/ Input voltage [V]	Moc/Power [W]	Wydajność LED/ LED Efficiency [lm/W]	Strumień LED/ LED Lum. output [lm]	Sprawność oprawy/ Lum. efficiency	Wsp. oddawania barw/ Color Index	Temp. barwowa/ Color Temp. [K]	Wymiary WxLxH/ Dimensions WxLxH [mm]
AC(85-265)/ (50-60)Hz	40	170	6800	>0,90	>70/80	3000-5000	126x296x223
AC(85-265)/ (50-60)Hz	70	170	11900	>0,90	>70/80	3000-5000	126x296x223

Monta /Assembly: na cienny / wall mounted
Obudowa/Housing: odlew aluminiowy / aluminum casting
Kolor/Color: czarny / black
Optyka/Optics: soczewkowa / lens
Zakres temp. pracy/Working temp. range: -30°~+50°
Żywotność LED(L80)/LED Lifetime (L80): 55 000 h
Klasa ochronności IEC/Protection class IEC: I (II*)
Stopień ochrony/Protection Rating: IP 65
Zastosowanie/Application: ogrody, parkingi, aleje /
 gardens, parkings, alleys
Gwarancja/Warranty: 5 lat / 5 years

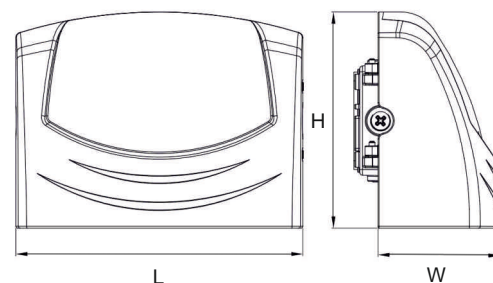

*opcjonalnie/option